

LOYBT-TEMP1, LOYBT-TEMP2

Bluetooth® temperature/humidity Sensor

Installation instructions

Instructions de montage







Istruzioni di montaggio

Montageanweisung

Instrucciones de montaje

Montagevoorschrift



Monteringsanvisning

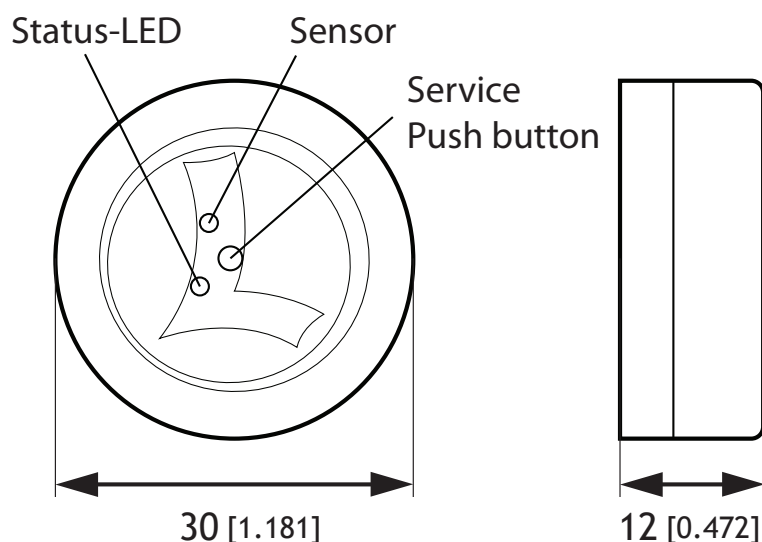


Status-LED:	
flashes once	• after power up when provisioned • to acknowledge button press
flashes 3 times	• after power up when unprovisioned • after factory reset
Service push button:	
short press	• add device to mesh when unprovisioned • publish sensor data when provisioned
press for 15 seconds	factory reset

U.S. FC Contains FCC ID: H79DFBM-NW726-DTO
E.U. CE
Taiwan 內含藍芽模組 CCAM18LP1230T4
Japan   201-180639

turn left to unlock ($\sim 15^\circ$)

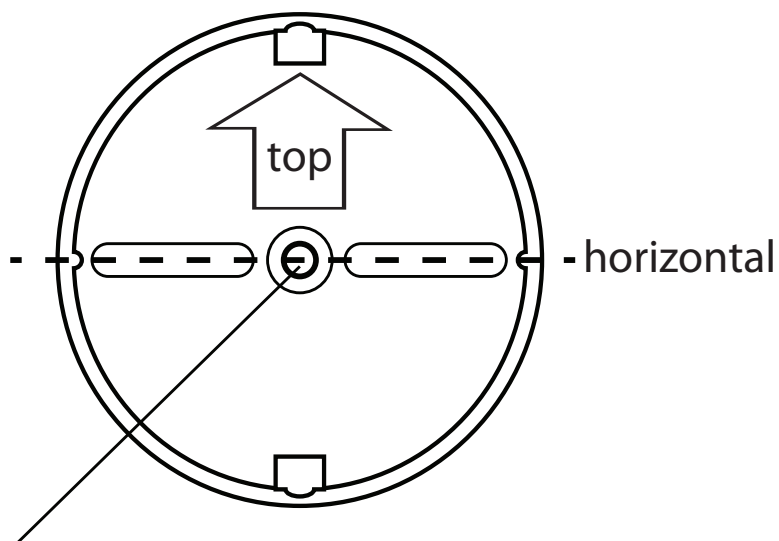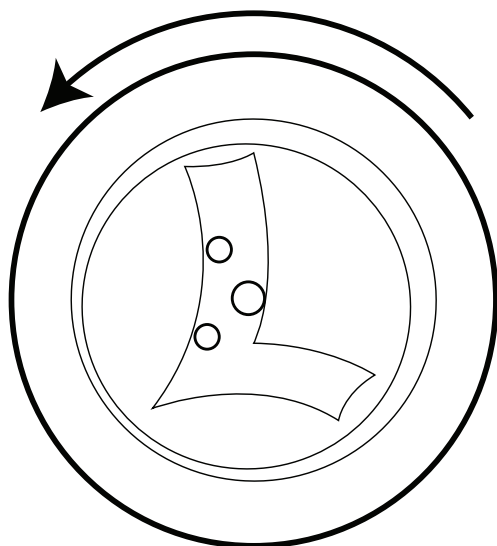

Mount using hole or
adhesive film on back side

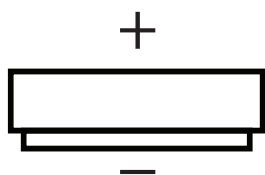

Insert CR2032
Battery here



Remove battery protection
paper before comissioning.
Secure case by turning it right.

turn right to lock

